

Configuration	
Parts	High configuration
Smart safety parts	Intelligent shifting transmission box
	Wet type brake drive axle
	Hydraulic service brake
	OPS
	Self lock valve of tilting cylinder
	FICS
	9 inches cyclone airfilter with dual cores (with pressure alarm)
	Power switch
	Oil tank with lock
Comfortable parts	Full suspension seat
	Lowering buffering for rear lifting cylinder, upper buffering for front lifting cylinder
	Adjustable steering column
	Reversing handle with integrated horn
	USB interface
	Instrument identification (card swipe or password for start)
	Fan
	Reversing speaker
	Meet the latest emission requirements(EU V)
Environment friendly parts	Load sensing steering
	LCD instrument

Note: "●" standard; "○" optional

Configuration	
Parts	High configuration
Cab	Front windshield (with wiper)
	Rear windshield
	Panel mounted cab
	Panel mounted cab (with heater)
	Panel mounted cab (with heater and air conditioner for cooling)
	Panel mounted cab (with air conditioner for cooling)
	Panel mounted cab (with air conditioner)
	LED lights for whole truck
	LED rear working lights (2)
Lights	Warning light (rotating)
	Warning light (rotating and buzzer)
	Blue light
	Normal mast
	Full free mast (two stage or three stage)
Lifting system	Non-standard attachment
	Mast height
	Hydraulic fork positioner (8.5-10t)
	Fork carrier (5-7t)
	Backrest (5-7t)
	Sharp type fork
	Winder fork carrier
	Metric thread
	American thread
Others	Solid tyre
	Traceless solid tyre
	Sleeve for tilting cylinder
	Sleeve for steering cylinder
	Universal key
	Customer made color

Note: "●" standard; "○" optional

HELI AMERICA INC

ADD: 4025 Welcome All Road, Suite 150 Atlanta, GA30349, U.S.A.

E-MAIL:heli@heliforkliftamerica.com

TEL: 404-242-3288

* Our products are subject to improvements and changes without notice.

**CPCD 55/60/70
/85/100
CU1ZG3/CU1G3**



11000-22000lbs
G3 series Internal Combustion
Counterbalanced Forklift Truck



**Our power and confidence are from
reliable high quality products.**

Elegance in appearance, excellent in performance

Ecology and saving

The Euro V power engine is equipped with DOC+DPF+SCR post-treatment technology meeting the most stringent emission standards.



CUMMINS QSF3.8 Euro V/T4F




YUCHAI YCA05115-S500 (optional)

A reliable drive system

The transmission box designed and manufactured by HELI specially for the model is equipped on the truck. As reliable transmission system produced by HELI, it has been validated by over twenty years experience in the world market. Meanwhile, various ancillary devices of the power system ensure the reliability effectively.



Through LCD instrument and good human-computer interaction, the operator can monitor the truck status in real time.

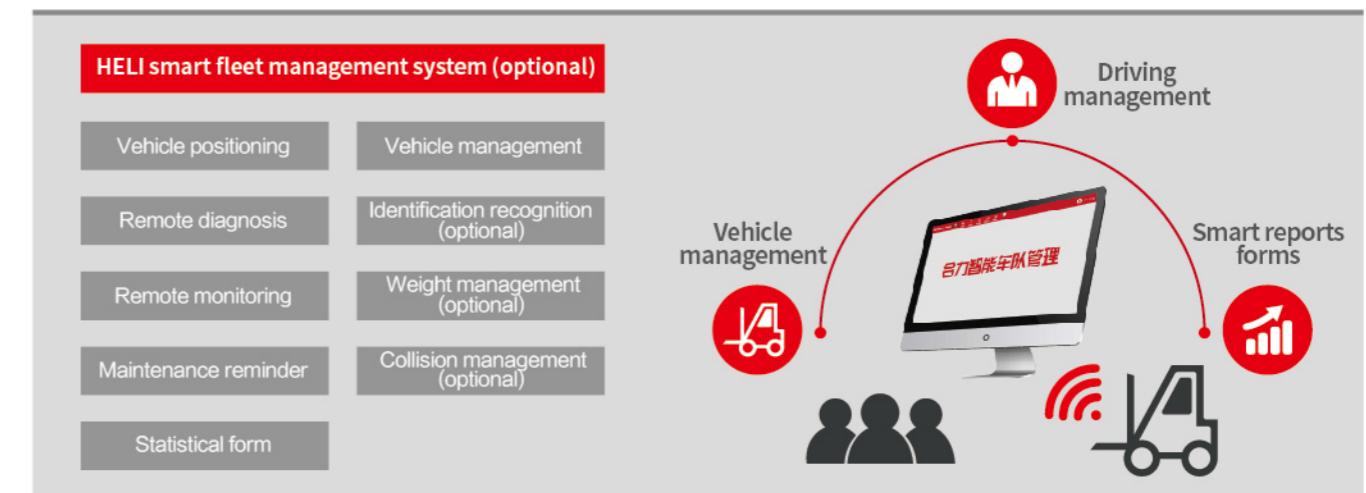

Option configuration of intelligent safety buffer system cushion operator from effects of riding over uneven surface and it is more comfortable.

• Vibration shock reduction


When driving under load conditions, the impact caused by uneven surface is greatly absorbed, and the vibration is effectively reduced.

• Vibration and noise reduction


When driving under load condition, the impact noise caused by uneven surface is greatly reduced.

• Reduced driving fatigue

During the emergency stop operation during the load lowering process, the vibration and driving fatigue caused by inertia impact can be effectively reduced, and the driving safety can be improved.

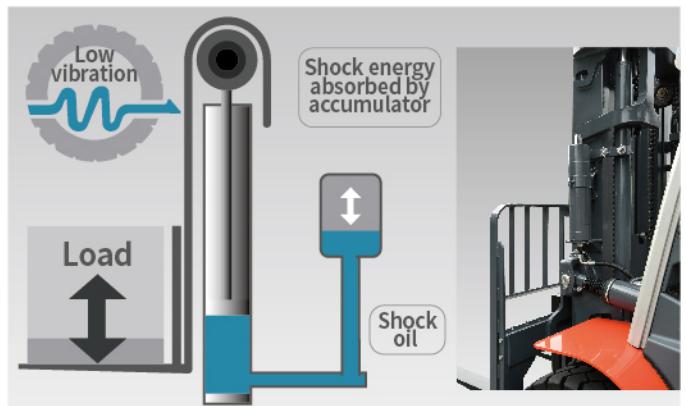


Standard configuration of oil cylinder lower buffer, comfortable operation

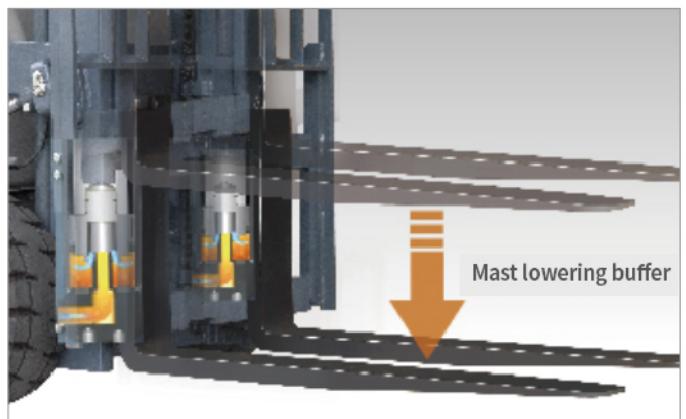

Multi system joint optimization design (active noise reduction of engine, transmission box, axle and hydraulic oil pump, application of sealing sound insulation materials of the whole truck) reduces truck noise.




Hydraulic synchronous steering system can adjust steering wheel and wheel angle offset smartly and offers accurate steering and comfortable driving; (optional)

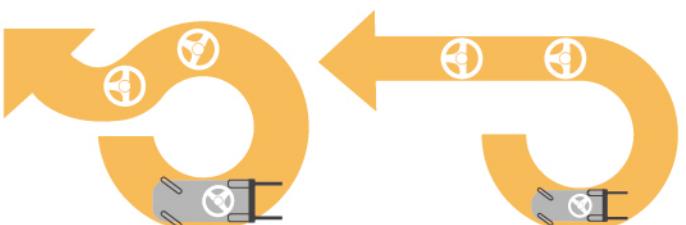

Ratchet type parking brake



It contains semi-enclosed normal seat, and adopts the techniques which are weight stepless adjustment and shock absorption, and vacuum cold foam molding. Seat armrest and backrest is a whole. Contact switch is optional.

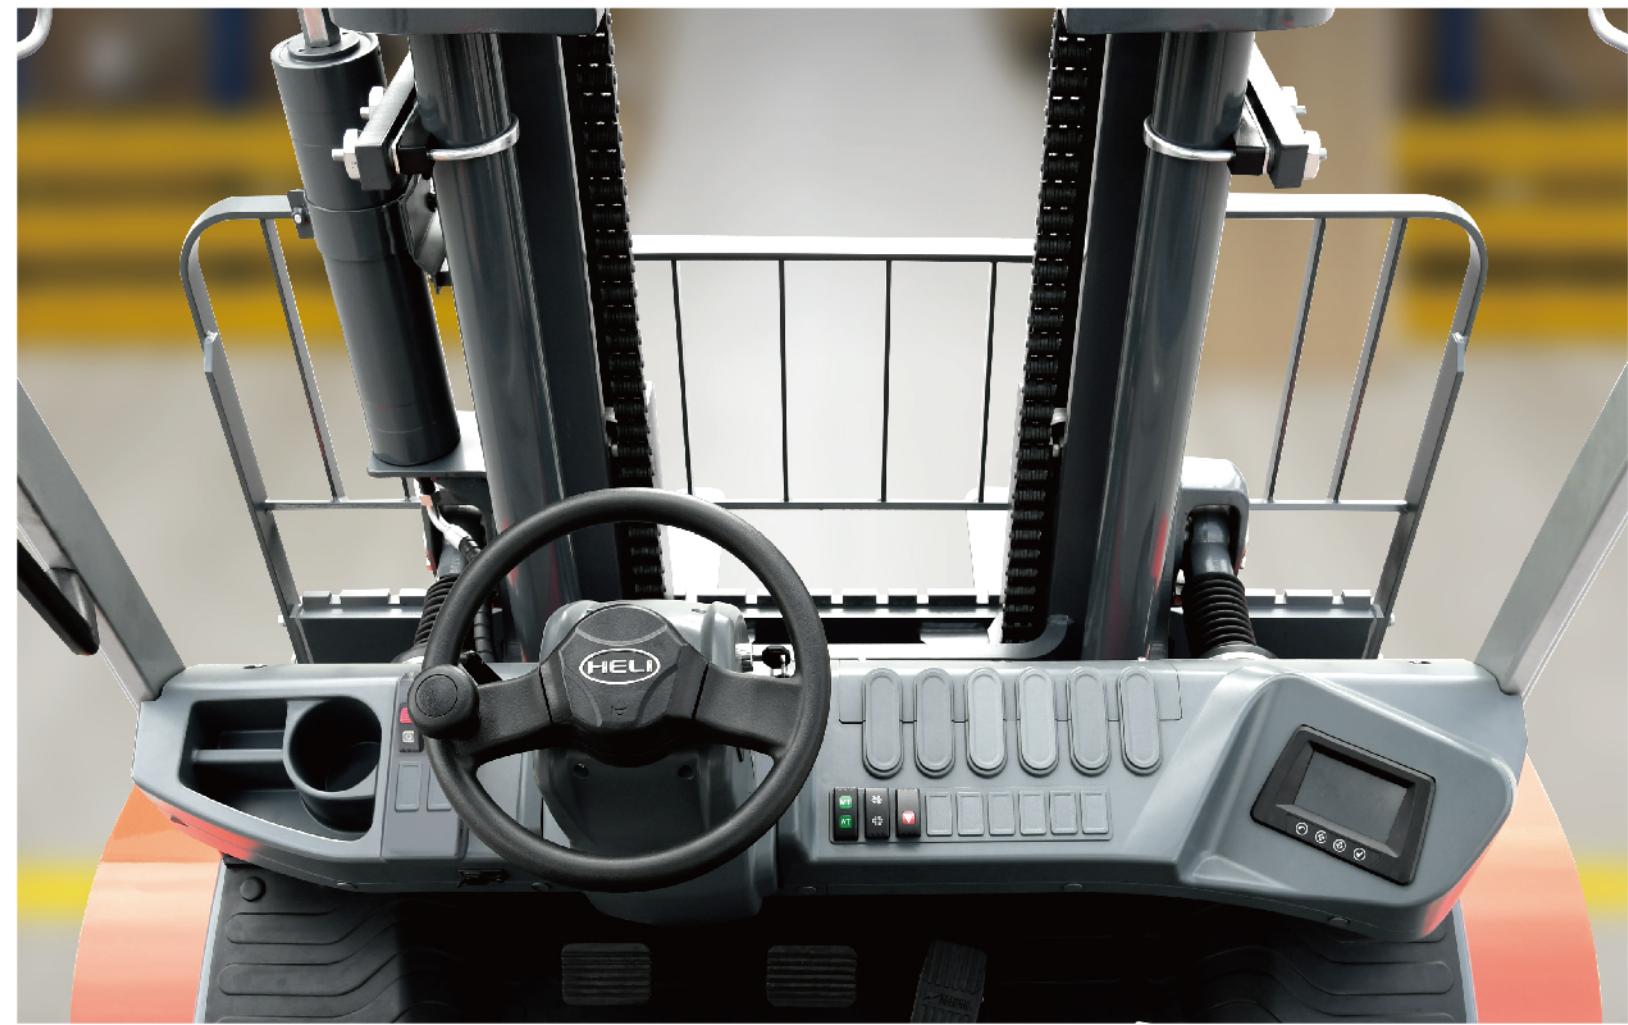

High efficient and safe

Smart protection on gearbox and engine ensure the safety of the whole truck.



Smart protection on high engine water temperature, low oil pressure, intake pressure and temperature





- Operator present system (after the driver leaves the seat accidentally, walking and lifting function of the whole truck is terminated) prevents the potential safety hazards caused by misoperation.
- When parking brake works, truck travel function is prohibited and thus the safety of driving operation is improved;
- Start protection function, fingertip operation system and anti-restart protection function from non-neutral gear ensure operation safety;
- The truck is equipped with large capacity air filter with safety filter element and pressure alarm function;
- The optimal design of power suspension increases the limit of limit impact to protect the power assembly from accidental impact;
- Truck safety warning: reverse image system, warning light, etc. (optional)



Reliable quality

HELI has been committed to the research of truck reliability for many years, and the core parts have been verified by the market for a long time. The truck goes through high standard reliability test before marketing, long-time quality tracking and verification after marketing, and strict control of various performance indicators.

- The CAE forward design improves the strength of structural parts;
- Wet braking with forced oil cooling radiator ensures the stability and reliability of braking performance under extreme conditions;
- High performance cooling system ensures the heat dissipation performance of the whole truck.

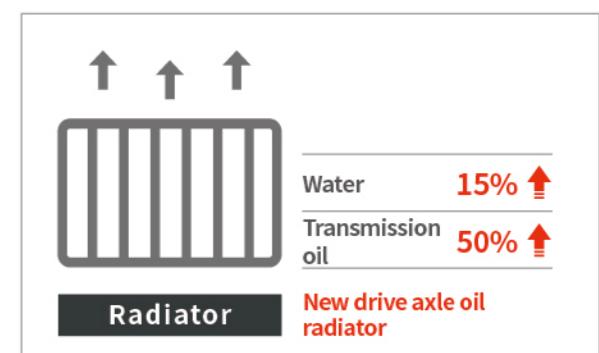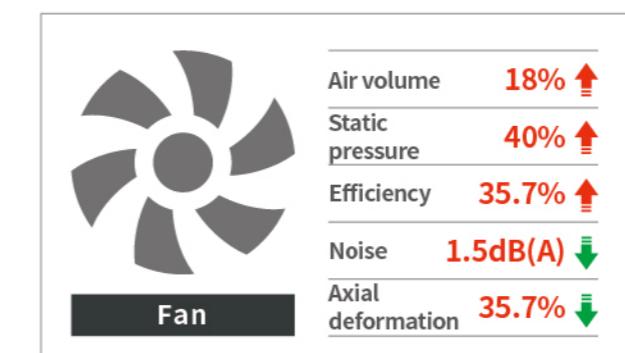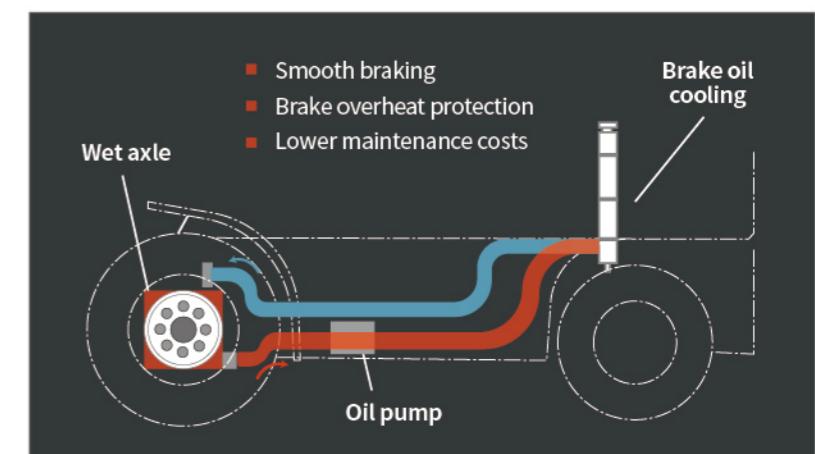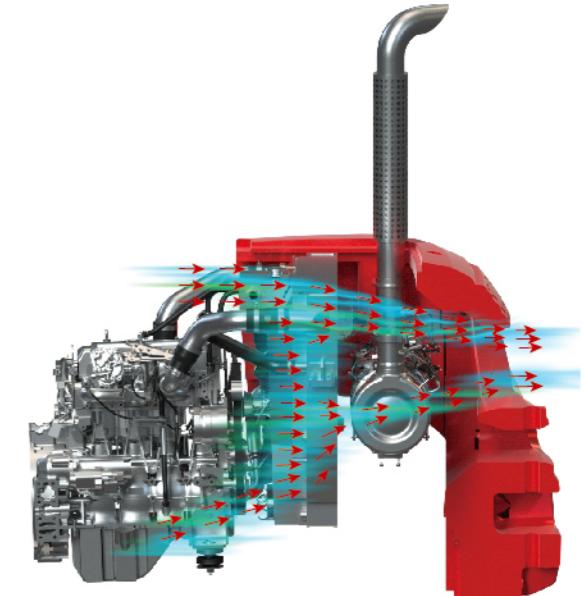

Note: the above data are from the comparison with G series 7t internal combustion forklift truck

Harsh truck key parts endurance reliability test ensures the long-term reliability of core parts.




Higher standard endurance reliability test and high-intensity industrial verification of the whole truck ensures the reliability of long-term use of the whole truck;



Efficient and convenient maintenance

Super long maintenance cycle of core parts

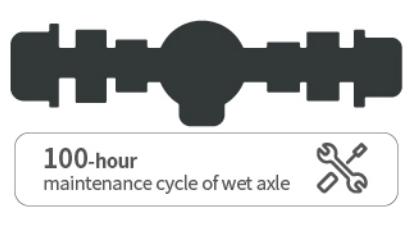

Integrated electrical cabinet and embedded instrument make disassembly and maintenance easy;



Timely remind maintenance information is given through instrument;



Large opening angle hood and detachable front and rear floor make check and repair easier;



Manufacturer and Technical Data(Tabulation1)

Characteristics

HELI							
1.01	Manufacturer			CPCD55		CPCD60	CPCD70
1.02	Model			CPCD85		CPCD100	
1.03	Configuration number			CU1ZG3/CU1G3			
1.04	Rated capacity	Q	lb	11000	13000	15500	18500
1.05	Load center distance	c	in	24			
1.06	Power mode			Diesel			
1.07	Driving mode			Seat-type			
1.08	Front overhang	x	in	22.6	22.8	23	27
1.09	Wheelbase	y	in	90.5		98.4	109.3
Weight							
2.01	Total weight		lb	18673	19841	21164	25573
2.02	Axle load (laden,front/rear)		lb	26455/3240	29519/3549	32606/3990	39022/5291
2.03	Axle load (unladen,front/rear)		lb	9766/8907	9414/10428	9193/11971	10472/15102
Tyres							
3.01	Tyre type			Pneumatic type			
3.02	Tyre size,front			8.25-15-14PR		9.00-20-14PR	
3.03	Tyre size,rear			8.25-15-14PR		9.00-20-14PR	
3.04	Wheels,number front/rear (x=driven wheels)			4X/2			
3.05	Tread, front	b ₁₀	in	60		63	
3.06	Tread, rear	b ₁₁	in	67			
Dimensions							
4.01	Mast tilt angle (forward/backward)	a/β	°	6/12			
4.02	Height (mast lowered)	h ₁	in	98		106	112
4.03	Free lifting height	h ₂	in	6	6.3	6.5	7.5
4.04	Lifting height (standard)	h ₃	in	118			
4.05	Max. height,extended (with backrest)	h ₄	in	173		167	174
4.06	Height of overhead guard	h ₅	in	88		101	
4.07	Seat height relating to SIP (to ground)	h ₇	in	56.5		60.6	
4.08	Towing coupling height	h ₁₀	in	21		23.6	
4.09	Overall length (with fork)	l ₁	in	185	189	192	204
4.10	Overall length (without fork)	l ₂	in	137	141	144	156
4.11	Overall width	b ₁	in	81		85	
4.12	Fork size:thickness x width x length	s/e/l	in	2.2/5.9/48	2.4/5.9/48	2.6/5.9/48	2.8/6.9/48
4.13	Fork carriage,according to ISO2328			4A		/	
4.14	Distance across fork-arms, Max./Min.	b ₅	in	11.8-72.6		18.5-78.3	18.5-82.7
4.15	Ground clearance (laden,between mast)	m ₁	in	7.1		9.8	
4.16	Ground clearance (center of wheelbase)	m ₂	in	9.1		12.8	
4.17	Right angle stacking aisle width for pallet 39.4" x47.2" crossways	A _{st}	in	196.8	199	202.2	217.2
4.18	Right angle stacking aisle width for pallet 31.5"x47.2" lengthways	A _{st}	in	204.7	206.9	210.1	225.1
4.19	Min. outside turning radius	W _a	in	127	129	132	143
Performance Data							
5.01	Travel speed (laden/unladen)		mph	18/19.3		16.8/18.6	16.8/18.6
5.02	Lift speed (laden/unladen)		ft/min	97.4/102.4	96.4/102.4	95.5/102.4	76.8/82.7
5.03	Lowering speed (laden/unladen)		ft/min	100/90.5		90.5/70.9	
5.04	Max.drawbar pull (laden/unladen)		lbf	17085	16860	16635	17085
5.05	Max.gradeability (laden/unladen)		%	66/19	57/19	50/19	39/19
Combustion-engine							
6.01	Engine manufacturer/Moel			CUMMINS QSF3.8 T4F			
6.02	Rated power/Speed		hp/rpm	122/2200			
6.03	Max. torque/Speed		lb.ft/rpm	678/1500			
6.04	Cylinder number-bore x stroke			4-102*115			
6.05	Engine displacement		L	3.8			
6.06	Emission			T4F			
6.07	Transmission gears (front/rear)			Front2/Rear 2, Hydraulic transmission			
6.08	Fuel tank capacity		L	160			
Addition data							
7.01	Service brake/Parking brake			Power braking / Mechanical			
7.02	Operating pressure for attachments		psi	/			

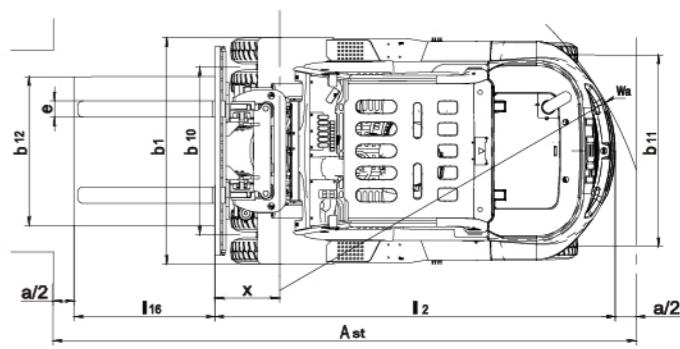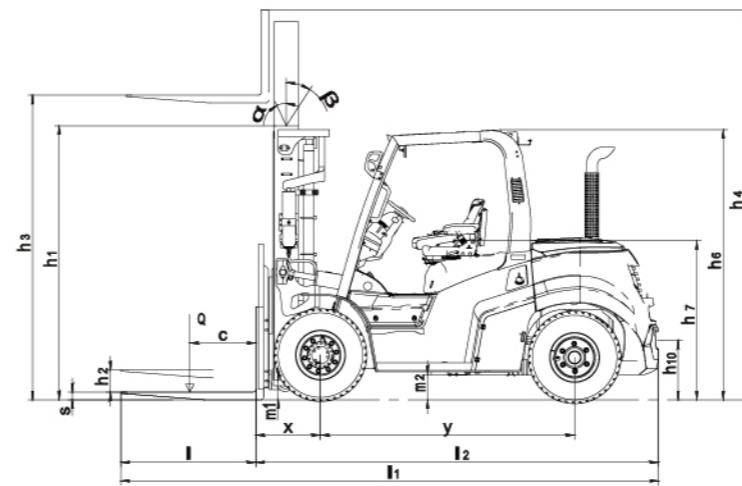


Ast: Right angle stacking aisle width

a: Clearance

l: Load Length

Load curve

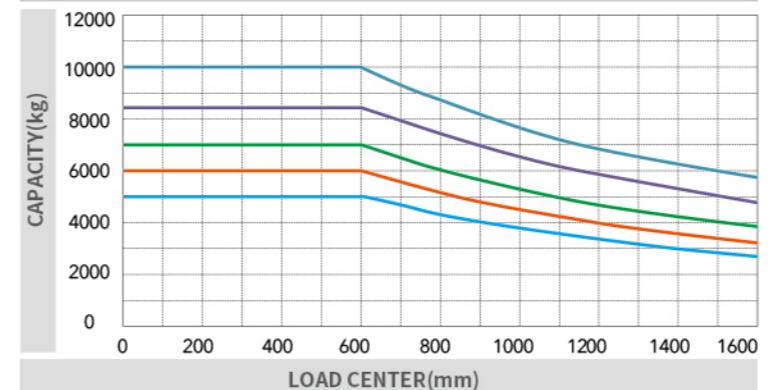

Note: The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. The standard load means a cubic with 1000mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.

Wide View Standard Mast(11000-15400LB)

Mast model	Max.lifting height (in)	Load capacity (lode center 24 in)(lb)			Height (mast lowered) (in)	Service weight (lb)			Mast tilt angle α/β (deg)
		CPCD55	CPCD60	CPCD70		CPCD55	CPCD60	CPCD70	
M200	79	11000	13200	15400	81.9	18315	19481	21492	6/12
M250	98	11000	13200	15400	87.8	18456	19622	21540	6/12
M270	106	11000	13200	15400	91.7	18526	19692	21584	6/12
M300	118	11000	13200	15400	97.6	18634	19800	21692	6/12
M330	130	11000	13200	15400	103.5	18742	19908	21800	6/12
M350	138	11000	13200	15400	107.5	18812	19978	21870	6/12
M375	148	11000	13200	15400	112.4	18902	20068	21960	6/12
M400	157	11000	13200	15400	119.3	19268	20434	22326	6/12
M425	167	11000	13200	15400	124.2	19356	20522	22414	6/12
M450	177	11000	13200	15400	129.1	19446	20612	22504	6/12
M475	187	11000	13200	15400	134.1	19536	20702	22594	6/6
M500	197	11000	13200	15400	139	19624	20790	22682	6/6
M550	217	10450	12540	14520	150.8	20051	21217	23109	6/6
M600	236	9680	11880	14080	160.6	20231	21397	23289	6/6

Wide View Full Free 2-Stage Mast(11000-15400lb)

Mast model	Max.lifting height (in)	Load capacity (lode center 24 in)(lb)			Height (mast lowered) (in)	Free lift (with backrest) (in)	Service weight (lb)			Mast tilt angle α/β (deg)
		CPCD55	CPCD60	CPCD70			CPCD55	CPCD60	CPCD70	
ZM250	98	11000	13200	15400	87	33.1	18720	19886	21778	6/12
ZM270	106	11000	13200	15400	90.9	37	18801	19967	21859	6/12
ZM300	118	11000	13200	15400	96.9	42.9	18929	20093	21985	6/12
ZM330	130	11000	13200	15400	102.8	48.8	19052	20218	22110	6/12
ZM350	138	11000	13200	15400	106.7	52.8	19133	20299	22191	6/12
ZM375	148	11000	13200	15400	111.6	57.7	19239	20405	22297	6/12
ZM400	157	11000	13200	15400	118.5	64.6	19624	20790	22682	6/12
ZM425	167	11000	13200	15400	123.4	69.5	19738	20904	22796	6/12
ZM450	177	11000	13200	15400	128.3	74.4	19833	20999	22891	6/12
ZM475	187	11000	13200	15400	133.3	79.3	19936	21080	22994	6/6
ZM500	197	11000	13200	15400	138.2	84.3	20018	21184	23076	6/6
ZM550	217	10450	12540	14520	150	96.1	20502	21668	23560	6/6
ZM600	236	9680	11880	14080	159.8	105.9	20711	21877	23769	6/6

Note: (1) 11000-13200lb: the free lift without backrest 10.2" increased, (2) 15400lb: the free lift without backrest 7" increased.

Wide View Full Free 3-Stage Mast(11000-15400lb)

Mast model	Max.lifting height (in)	Load capacity (lode center 24 in)(lb)			Height (mast lowered) (in)	Free lift (with backrest) (in)	Service weight (lb)			Mast tilt angle α/β (deg)
		CPCD55	CPCD60	CPCD70			CPCD55	CPCD60	CPCD70	
ZSM360	142	9900	12320	13640	92	35.8	20137	21303	22975	6/6
ZSM400	157	9900	12320	13640	97	40.9	20269	21435	23107	6/6
ZSM435	171	9900	12320	13640	101.8	45.5	20396	21562	23234	6/6
ZSM480	189	9900	12320	13640	108	51.6	20830	21996	23668	6/6
ZSM500	197	9900	12320	13640	110.4	54.3	20898	22064	23736	6/6
ZSM540	213	9240	11660	13200	115.7	59.4	21050	22216	23888	6/6
ZSM600	236	8800	11000	12320	123.4	67.3	21245	22411	24083	6/6
ZSM650	256	7700	9900	11000	134.1	77.8	21441	22607	24279	6/6
ZSM700	276	7040	8800	9900	138.2	82.1	21558	22724	24396	6/6

Note: (1) 11000-13200lb: the free lift without backrest 10.2" increased, (2) 15400lb: the free lift without backrest 7" increased.

Wide View Standard Mast(18500-22000LB)

Mast model	Max.lifting height (in)	Load capacity (lode center 24 in)(lb)			Height (mast lowered)(in)	Service weight (lb)			Mast tilt angle α/β (deg)
		CPCD85	CPCD100	CPCD85	CPCD100	CPCD85	CPCD100	CPCD85	
M250	98	18500	22000	96.5	102.4	24026	27894	6/12	
M270	106	18500	22000	100.4	106.3	24145	27982	6/12	
M300	118	18500	22000	106.3	112.2	25520	28160	6/12	
M330	130	18500	22000	112.2	118.1	25742	28266	6/12	
M350	138	18500	22000	116.1	122	26061	28365	6/12	
M375	148	18260	22000	121.1	127	26237	28475	6/12	
M400	157	18260	22000	128	133.9	26622	28783	6/12	
M425	167	17600	22000	132.9	138.8	26963	28904	6/12	
M450	177	17600	19800	137.8	143.7	27227	29014	6/12	